

VIGILANT 500/I

24 Vdc electromechanical bollard 500 mm high



**MADE
IN ITALY**



9343000 **VIGILANT 500**

9343004 **VIGILANT 500I**

Ø 200 mm • H500 mm • \rightarrow 8/9,2 mm



24 Vdc electromechanical bollard, powder coating steel or AISI 316 electropolished stainless steel inish.

FEATURES

- High number of cycles and low power consumption
- Ability to operate even in the event of a power failure thanks to the central group with UPS
- Quick and easy to install thanks to the foundation box can be assembled on site without welding
- Equipped with RS485 communication bus and Ethernet connection via TCP / IP
- Device encoder integrated obstacle detection and amperometric
- Equipped with anti-vandal function, which allows to detect a forced command, to reset the bollard and activate an alarm

VIGILANT

500/I

POWER SUPPLY	230 Vac 50/60Hz
MOTOR SUPPLY	24 Vdc
ABSORBED POWER	90W
ABSORBED CURRENT 24Vdc	6 A
STANBY CONSUMPTION	10W
CONSUMPTION DURING RISING	1 A
MAXIMUM WORKING FREQUENCY*	900 cycles/day
PROTECTION LEVEL	IP68
OPERATING TEMPERATURE	-20 °C / +50 °C
LUBRICATION	Grease
IMPACT RESISTANCE	18.000 J
BREKOUT RESISTANCE	240.000 J
KG VEHICLE-KM/HOUR	2.500-55
RAISING TIME 120mm/sec	4"
LOWERING TIME 160mm/sec	3"
ELECTRIC BRAKE	2N
WEIGHT (without foundation case)	84/90 kg

(*) The maximum frequency of use indicated in the above table must be understood as indicative data, referred to a single bollard connected to a control panel, at standard temperature rating (20°C, 50% humidity). In the case of unfavorable conditions the frequency of use has to be reduced.



PLUG&PLAY Connection between bollard and control panel



EN124 (40T) Top equipped with LED lights

ACCESSORIES

RES [9679001]	BUZZ [9534040]	AUT [9176980]	EB5 [9360010]	KTOOLS [9089010]	CA500A [9150002]	TOP20 [9261000]	C05/10/15/20/25 [9171005 / 006 / 007 / 008 / 009]
Heating resistance for cold areas (accessory supplied pre-assembled).	Warning buzzer (accessory supplied pre-assembled).	Device that allows an automatic lowering maneuver of the bollard in case of power failure (accessory supplied pre-assembled).	5N Electrobrake (accessory supplied pre-assembled).	Set of installation tools.	Foundation box in steel with cathaphoresis treatment. Quick assembly with screws.	Cover for foundation box CA500A.	Cable with connector L= 5/10/15/20/25 m.



STANDOOR HELLAS

K. KATSOULIS AUTOMATIC DOORS SA

58 Eleon Ave., N. KIFISSIA 14564

ATHENS - GREECE

TEL: +30 2106250203, FAX: +30 2106253474

URL: www.standoor.gr & email: contact@standoorhellas.gr



VIGILANT 500/I


Control panels and components for a basic installation*



MADE IN ITALY

CP1	9176145	CP2	9176146	CP4	9176147
CP1K	9176152	CP2K	9176153	CP4K	9176154

FEATURES

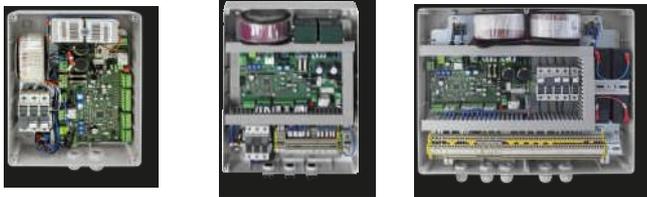

- Power supply: 230/250 Vac - 50/60 Hz - transformer with selectable voltage
- Equipped with command ALL UP / ALL DOWN
- 8 control inputs / 4 control inputs for loop detectors / 2 static outputs 24 V
- 8-Dip switch programmable for different configurations
- Diagnostic LED
- Connection to Ethernet network via TCP/IP LAN
- Communication between the central bollard and central CP by means of the RS485 communication bus
- CP1K, CP2K, CP4K version with batteries for automatic operation during power failure
- Embedded electronics for the management of two traffic lights (no need CP.TL control board for traffic lights)
- 6 different configurations for loop detectors
- Prepared for any kind of command


1 VIGILANT 500/I

CP1|CP1K




2 VIGILANT 500/I

CP2|CP2K

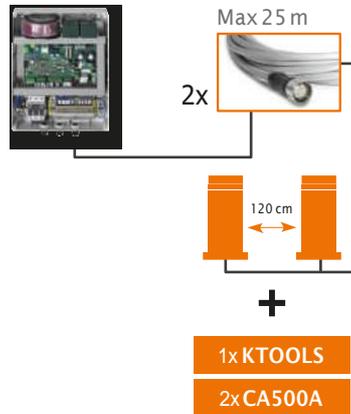


3-4 VIGILANT 500/I


CP4|CP4K

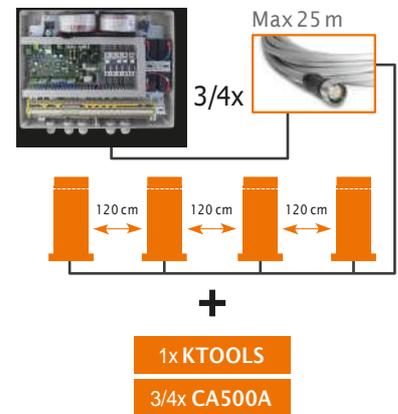

TECHNICAL DRAWING

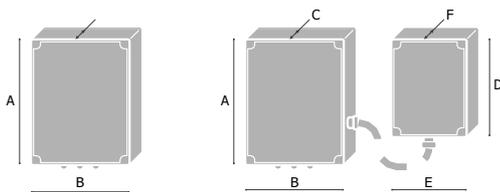

	A (cm)	B (cm)	C (cm)	D (cm)	E (cm)	F (cm)	IP GRADE
CP1	30	22	12	-	-	-	IP 56
CP2	38	30	12	-	-	-	IP 56
CP4	46	38	12	-	-	-	IP 56
CP1K	30	22	12	30	22	12	IP 56
CP2K	38	30	12	30	22	12	IP 56
CP4K	46	38	12	30	22	12	IP 56

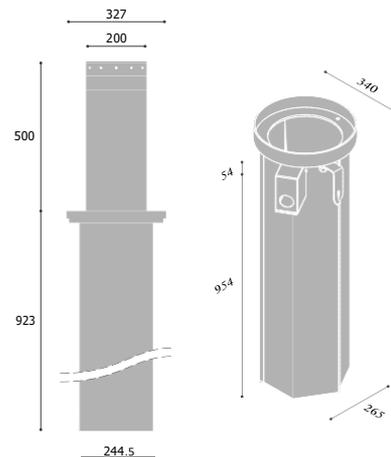

STANDOOR HELLAS
K. KATSOU LIS AUTOMATIC DOORS SA
 58 Eleon Ave., N. KIFISSIA 14564
 ATHENS - GREECE
 TEL: +30 2106250203, FAX: +30 2106253474
 URL: www.standoor.gr & email: contact@standoorhellas.gr