




STAVA.8



ROAD BARRIERS



integrated control box
with external release
1 spring 364 mm
galvanized and painted casing and cover
for passages up to 8 m

**FOUNDATION PLATE
NOT INCLUDED**

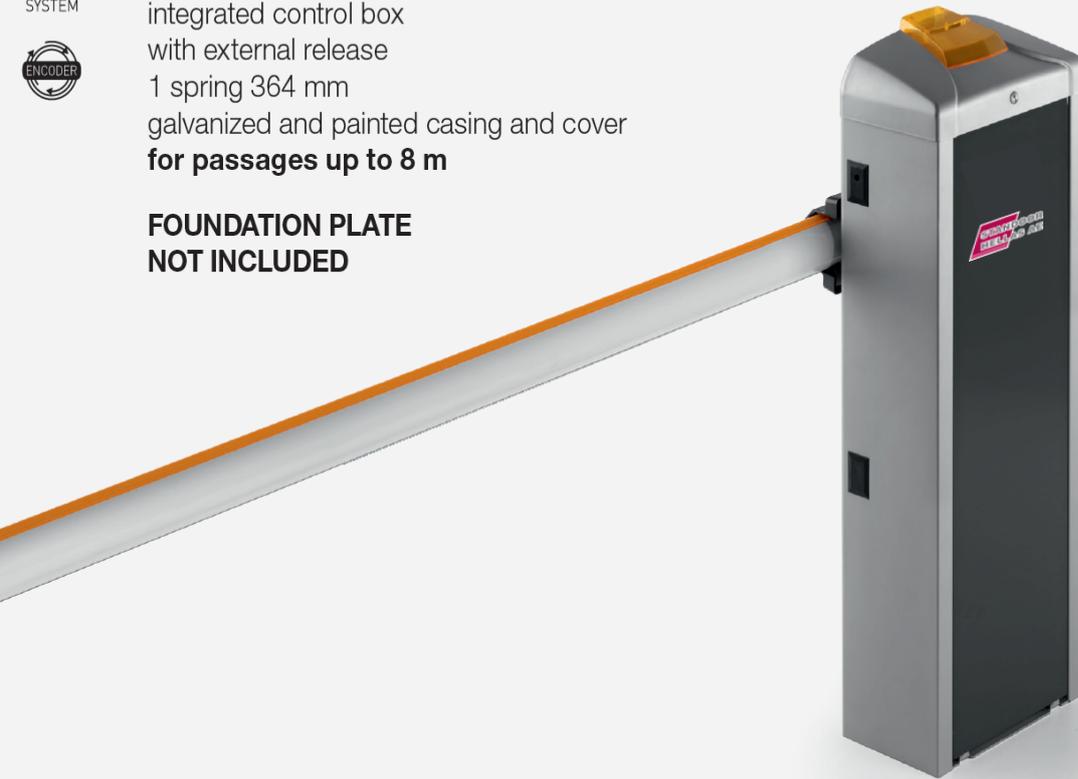

24 Vdc | intensive use

- 24 Vdc electromechanical barrier for intensive use with control panel with 433.92 MHz radio receiver and integrated battery charger.
- Power range switching extended from 100 to 250 Vac, 50/60 Hz to reduce standby power to a minimum.
- Control panel with LCD display. Possibility of self-testing the parameters and checking the condition of the safety devices (photo test). Compatibility with Advantouch device.
- Option to install photocells using concealed system so that they are perfectly integrated.
- Integrated absolute encoder, which ensures greater precision in slowdowns and advanced control of the boom movement so that it never loses the reference position of the boom even if there is a power cut or the automatic device is released
- Integrated STC System for precise torque calculation.
- Serial connection with SIS accessory data sheet, for fast and easy connection for operation in paired boom mode.
- Fast-acting release.
- Integrated flashing lamp

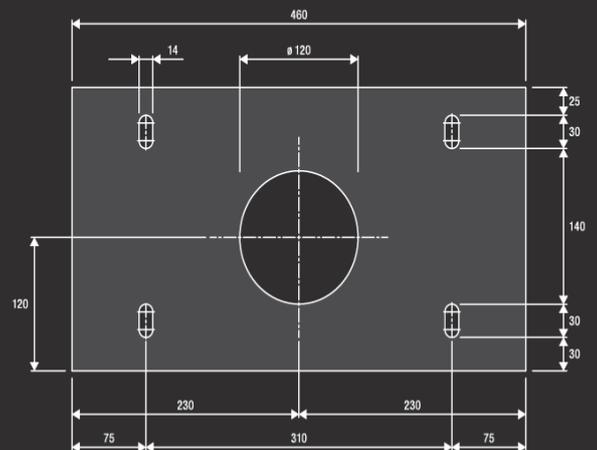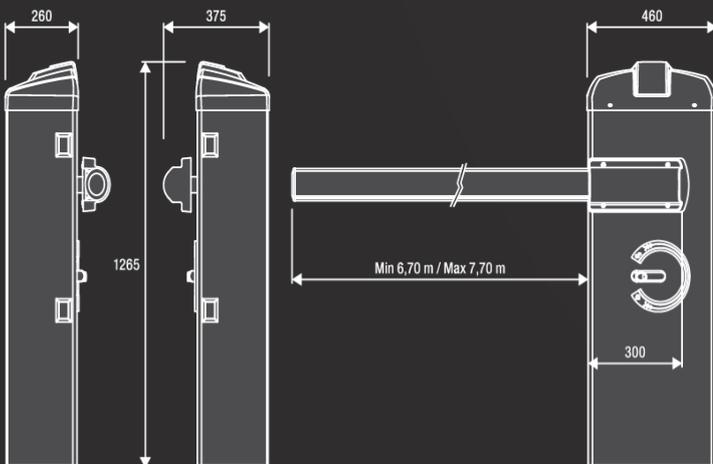



Elliptical arm of painted aluminium complete with cap, and anti-collision rubber profile (L. 8m). Available only in the two pieces version with joint.




Foundation plate with coach screws for EVA.8.



Thermostat for very cold places.



Mobile support for bars.



Aluminium rack L= 2 m. H= 60 cm



Painted fixed support.



Flashing light set



Single/two-channel loop detector.




Electronic card that allows synchronised movement of 2 automations (facing doors).



Traffic-light control unit for LED.TL.



2 light 230 Vac LED traffic light.




Flashing light set



System that reduces the electrical energy consumption



KIT for system operation via solar panel. For 24 Vdc models.



 **MADE IN ITALY**

ROD LENGTH	USABLE ACCESSORIES
8 m	---
7 m	

TECHNICAL DATA	STAVA.8
Code	9083235
Power supply	100-250 Vac (50-60Hz)
Motor supply	24 Vdc
Max absorbed current	1,6 A
Power consumption in stand-by	40 mA (230Vac) 50 mA (115 Vac)
Torque	285 Nm
Opening time	3,5" - 6"
Operation cycle	intensive use
Protection level	IP44
Operating temperature	-20°C /+50°C
Weight	110 kg