




**ΡΑΜΠΕΣ – ΓΕΦΥΡΕΣ ΦΟΡΤΟΕΚΦΟΡΤΩΣΗΣ
ΜΕ ΜΗΧΑΝΙΣΜΟ ΕΛΑΤΗΡΙΩΝ
ΙΚΑΝΟΤΗΤΑΣ 4 ΤΟΝΩΝ**



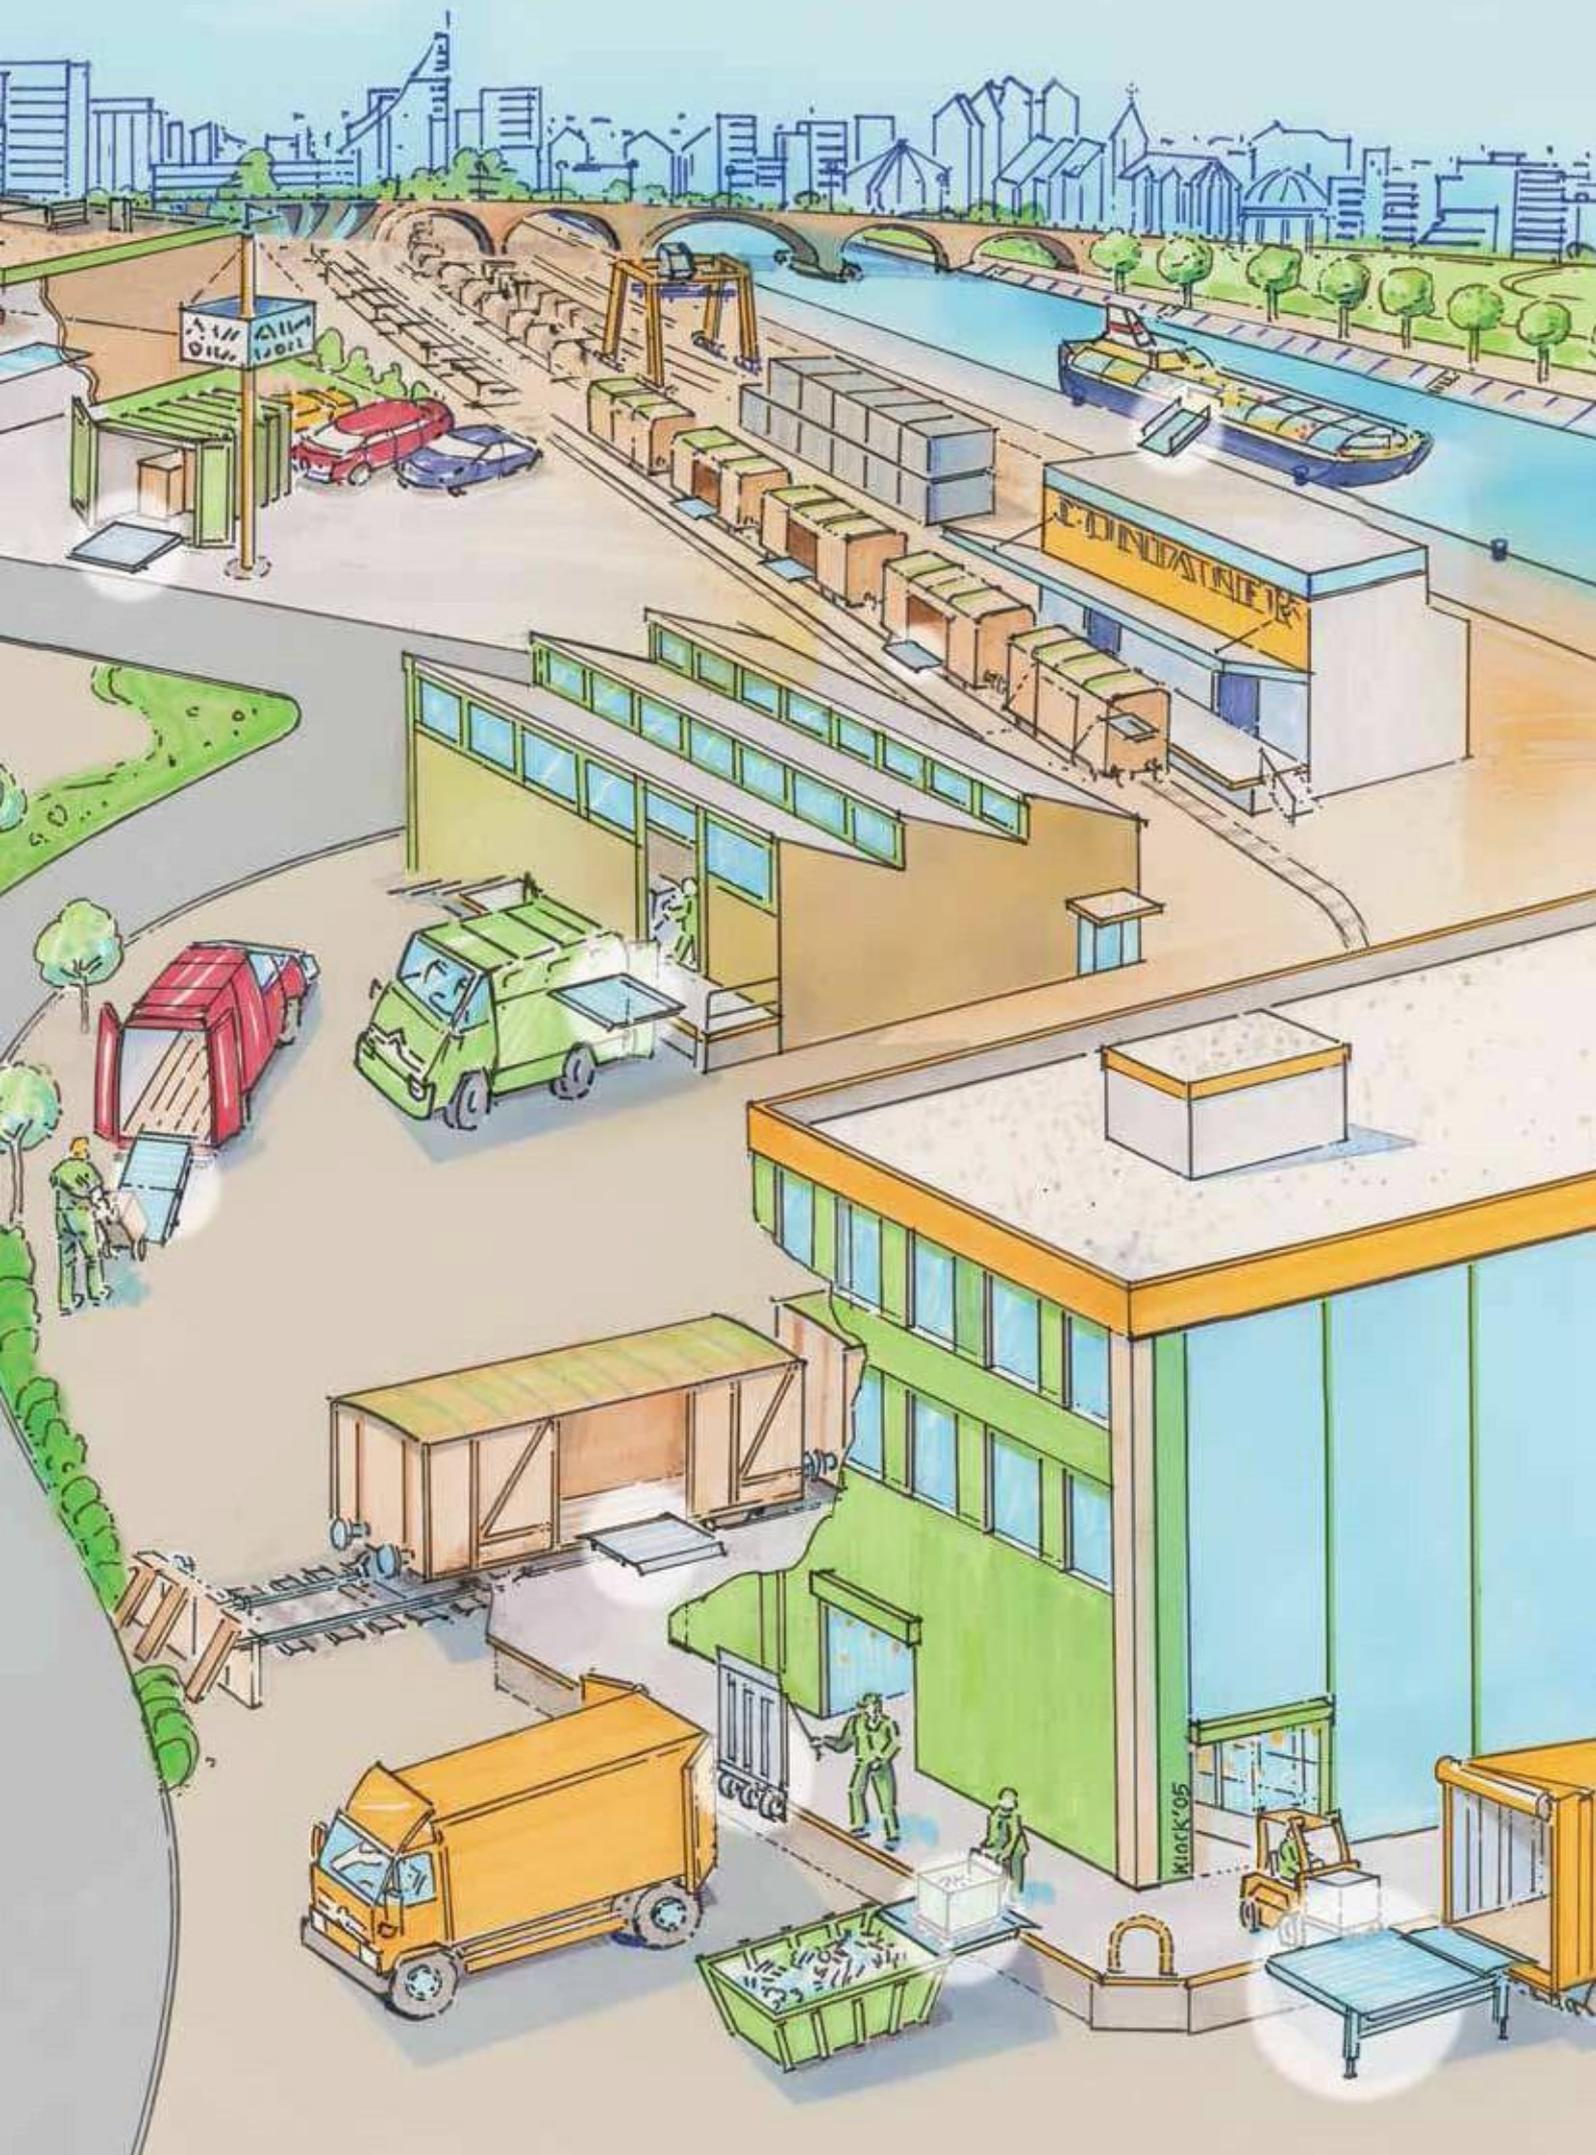

Type STKB

This drawbridge leveller is perfect for minor differences in levels.

Robust and maintenance free, they are suitable for a wide variety of uses and users. The STKB can slide from side to side and should be stored in a vertical position.





The automatic safety latch prevents the plate from falling when not in use and is easily released by foot.



Type	Length L (mm)	Width B (mm)	Dimension D (mm)	Height Difference (mm)		Capacity (kgs/ea)	Weight (kgs/ea)
				min.	max.		
STKB 00	410	1250	80	- 70	+ 30	4000	19
STKB 12	535	1250	100	- 90	+ 45	4000	24
STKB 13	785	1250	150	- 120	+ 75	4000	31
STKB 02	910	1250	170	- 135	+ 90	4000	36
STKB 04	410	1500	80	- 70	+ 30	4000	23
STKB 14	535	1500	100	- 90	+ 45	4000	28
STKB 15	785	1500	150	- 120	+ 75	4000	38
STKB 06	910	1500	170	- 135	+ 90	4000	44
							(kg/m)
	Guide rail galvanized, Length 3000 mm						8
	Guide rail galvanized, Length 2500 mm						8
	Guide rail galvanized, Length 2000 mm						8

Other dimensions on request

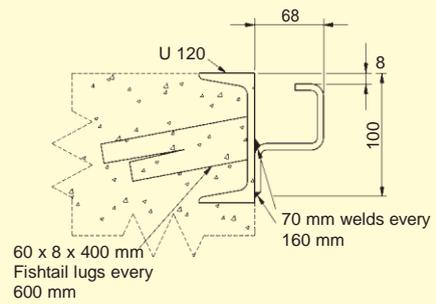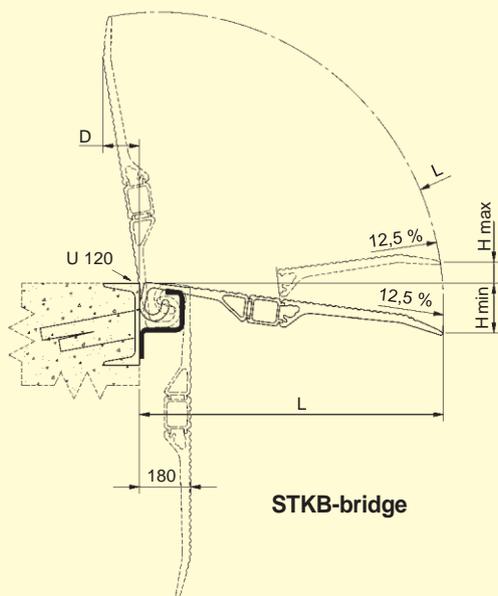

Type STSK

SKB drawbridge dock levellers are designed for medium duty applications and to provide easy, flexible loading of lorries up to a height difference of 190 mm from dock height. It is available as a static version, or as a sliding version to run in a steel guide rail. Additional rails can be fitted to allow the leveller to serve more than one loading position. The STSK guide rail is designed with an open base which prevents the collection of dirt or debris and ensures smooth, easy sideways movement.





Safety device detail



Detail of counter balancing mechanism.

STSK with spring system

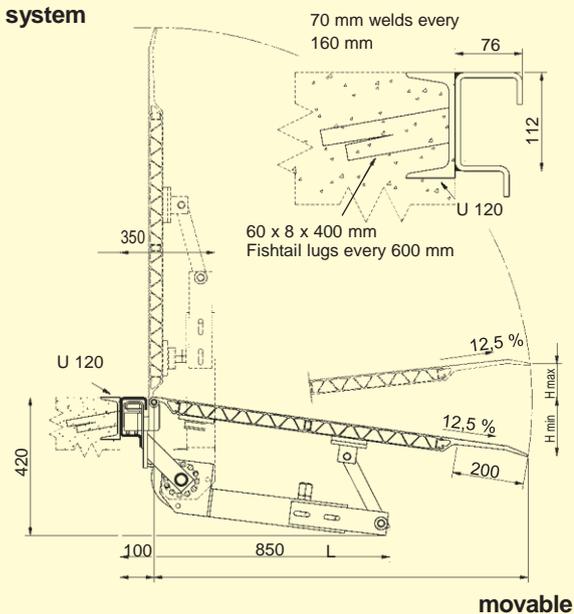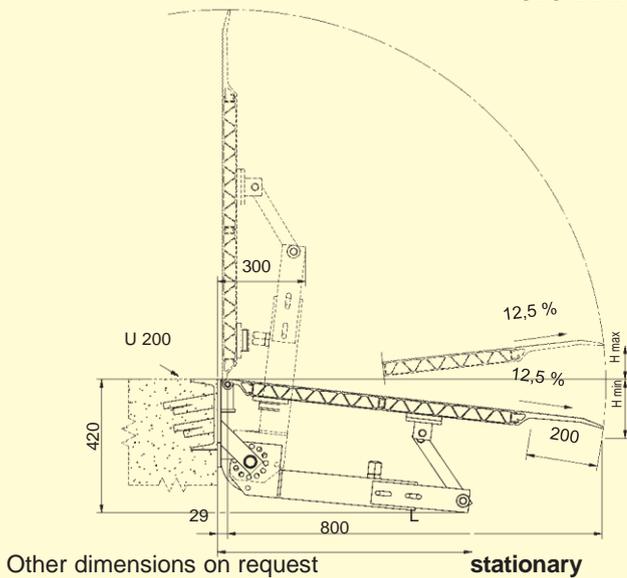




Version with segmented lip

Type	Length L [mm]	Width B [mm]	Height dif. [mm]		Capacity (kg/pcs)	Weight (kg/pcs)
			min.	max.		
STSK 01	815	1250	- 120	+ 80	4000	67
STSK 02*	1315	1250	- 185	+ 140	2500	102
STSK 03*	1565	1250	- 215	+ 175	1750	113
STSK 10	565	1500	- 90	+ 50	4000	67
STSK 11	815	1500	- 120	+ 80	4000	77
STSK 12*	1065	1500	- 155	+ 110	4000	103
STSK 13*	1315	1500	- 185	+ 140	4000	114
STSK 14*	1565	1500	- 215	+ 175	4000	128

*Model with spring system

Type	Weight (kgs/metre)
guide rail, mill finish, length 1000/2000/3000 mm	12
guide rail, galvanized, length 1000/2000/3000 mm	12

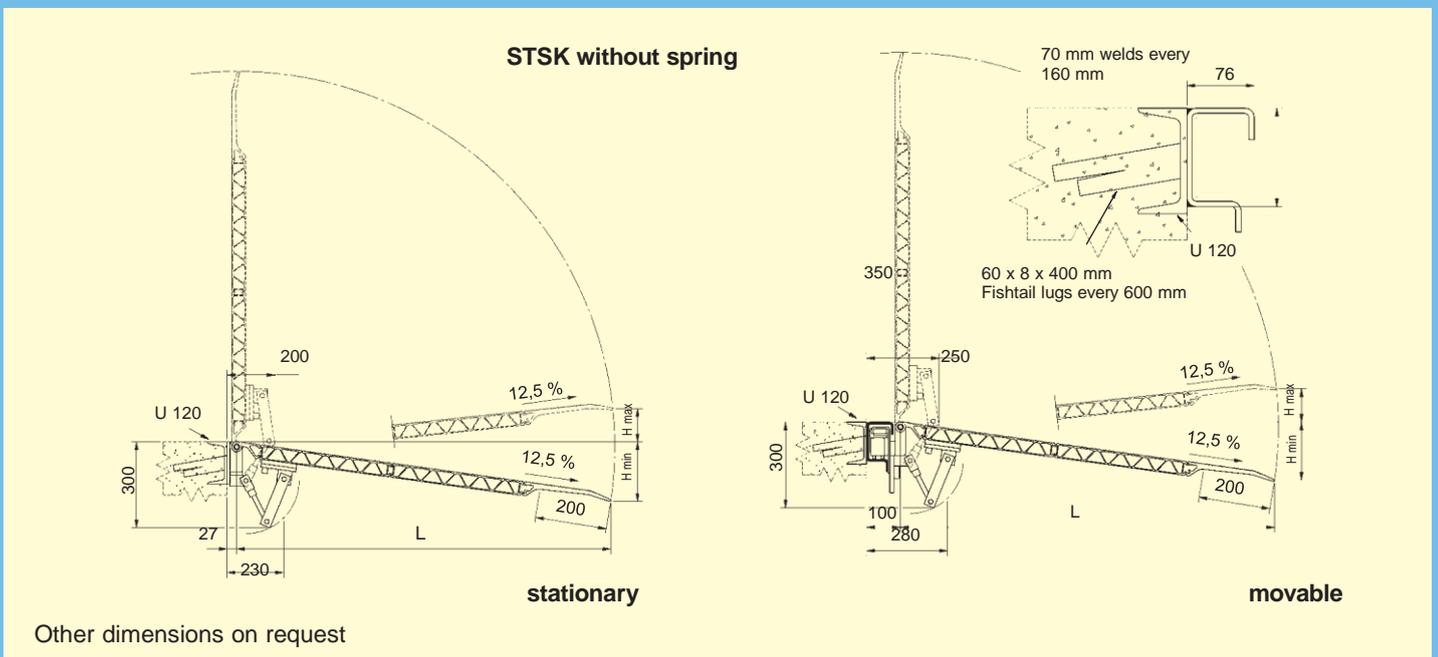

STSK without spring

stationary

movable

Other dimensions on request



STANDOOR HELLAS

Κ. ΚΑΤΣΟΥΛΗΣ ΑΥΤΟΜΑΤΕΣ ΠΟΡΤΕΣ ΑΕ

Λ. Ελαιών 58, Ν. ΚΗΦΙΣΙΑ 14564

Τηλ: +30 2106250203, Fax: +30 2106253474

URL: www.standoor.gr

email: contact@standoorhellas.gr